



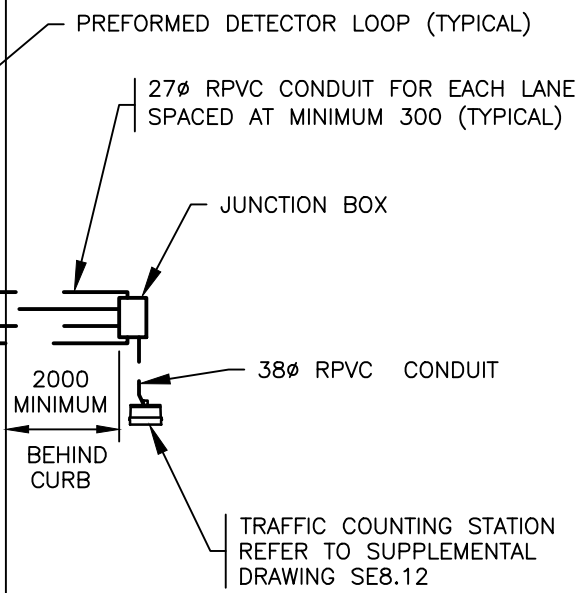


CONCRETE CURB AND GUTTER

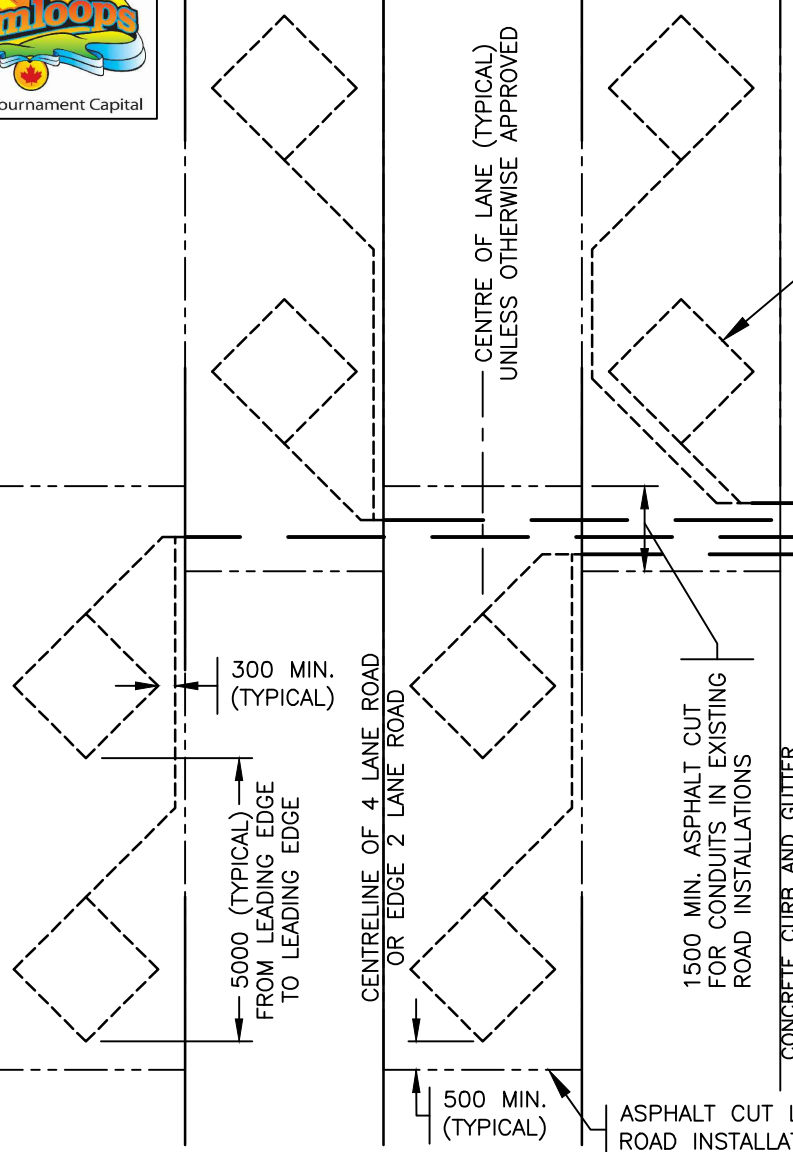

TYPICAL LOOP LAYOUT

N.T.S.

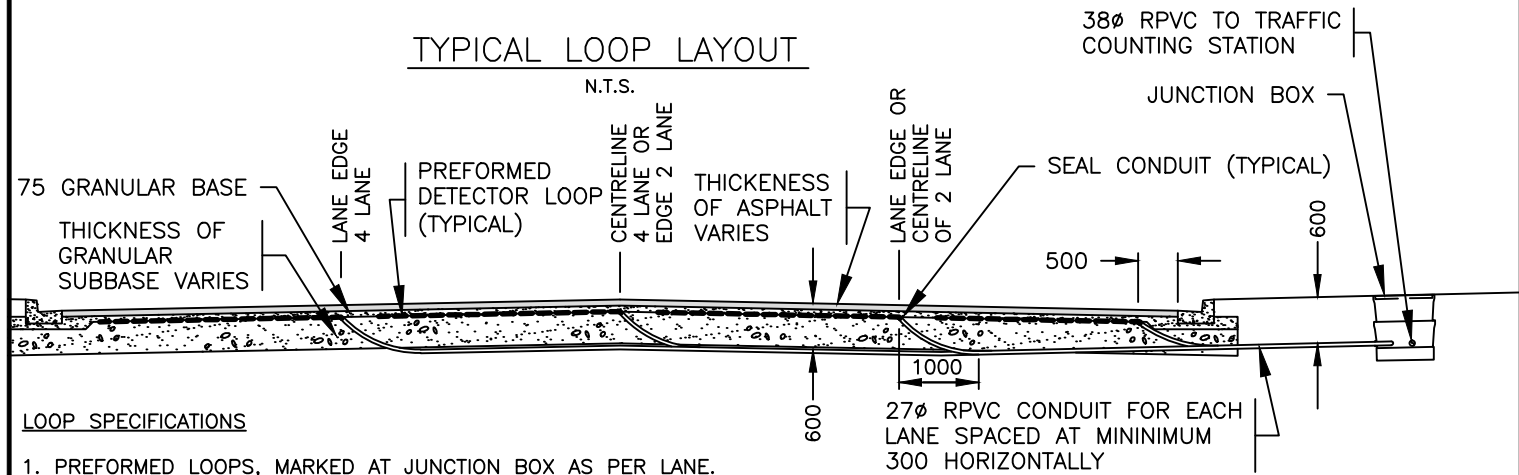

LOOP SPECIFICATIONS

1. PREFORMED LOOPS, MARKED AT JUNCTION BOX AS PER LANE.
2. PREFORMED LOOPS SHALL BE RENO A&E PHL TYPE.
3. CONDUIT AND WIRING SHALL BE BROUGHT OUT TO A LARGE CONCRETE MMCD DWG. E2.4 JUNCTION BOX (OR APPROVED EQUAL).
4. DETECTOR LOOPS TO BE PLACED 75mm UNDER ASPHALT UNLESS OTHERWISE APPROVED.
5. TWISTED BELDEN SHIELDED CABLE TO BE USED BETWEEN JUNCTION BOX AND CONTROLLER.
6. REFER TO CONTRACT DRAWINGS, SECTION 34 41 13 FOR DETAILED SPECIFICATIONS.
7. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED.

**TYPICAL TWO & FOUR
LANE COUNTING STATION
LOOPS & CONDUIT LAYOUT**

CITY OF KAMLOOPS

NO.	DATE	REVISION	DESCRIPTION	BY	APP